


SP-IP702EA IP Network Audio Pre-Amplifier

IP Public Address (PA) System IP Network Audio Pre-Amplifier

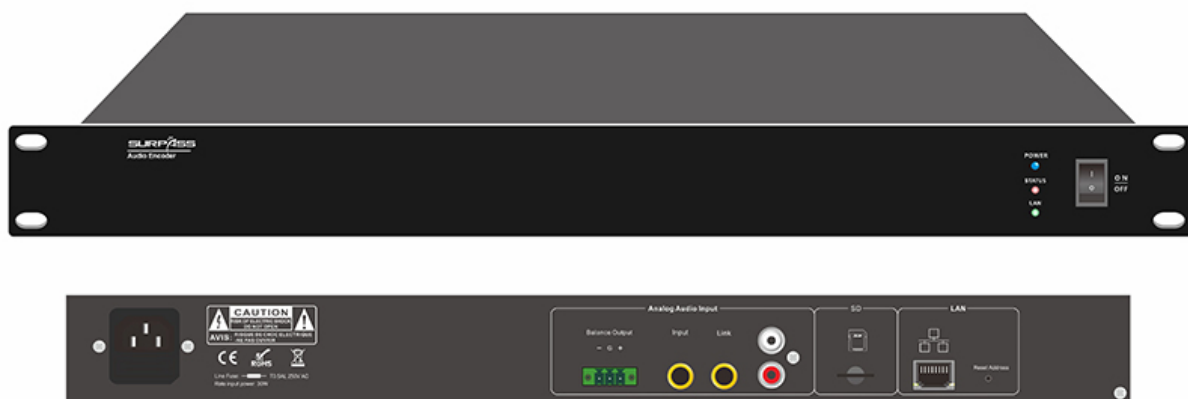

IP Public Address (PA) System IP Network Audio Pre-Amplifier Description:

The IP public address (PA) system key equipment to set up the IP PA sound system, it is convenient to set up sound over network system as one IP decoder, moreover it is also very useful to upgrade the traditional public address system into digital IP public address system by only add this IP network audio adapter and keep the existing PA system amplifier and loudspeakers.

The IP public address system network audio Pre-Amplifier with decoder is the main equipment of the IP network PA system. It is built-in decoder which can decode the network audio signal into analog to feed in analog amplifier.

IP Public Address (PA) System IP Network Audio Pre-Amplifier Specification:

Model	SP-IP702EA
Description	IP Network Audio Pre-Amplifier
Power Supply	AC230V or 110V
Power Consumption	5W
Network Protocol	TCP, UDP, ARP, ICMP, IGMP
Network Speed	10/100Mbps
Audio Format	Mp2, Mp3, PCM, ADPCM
Audio Sampling	8KHz-44.1KHz, 16 bits, 8K-320Kbps
S/N Ratio	≥90dB
Frequency Response	20Hz-20KHz
Data Delay	100 milliseconds
Connector	one aux output
Dimensions	483×256×44mm
Weight	3.2kg

IP Public Address (PA) System IP Network Audio Pre-Amplifier Feature:

- >> Capacity of control power amplifier 1000W.
- >> Support LAN/WAN and Internet network.
- >> Network data delay of less than 100 milliseconds.
- >> Program controllable power supply of AC 230V or 110V.
- >> The IP network audio adapter with decoder is the head of IP PA system.
- >> The IP network audio adapter with decoder can work with universal PA 100 volt amplifier and speakers.
- >> It is high capacity but cost-effective multiple room network sound system.
- >> The system could be set up over existing network, non dedicated network is needed.
- >> System capacity of 300 adapters online simultaneously.